

1080nm 1x2 2x2 PM Fiber Fused Coupler

1080nm 1x2, 2x2 Polarization Maintaining (PM) Fused Coupler is built with fused biconical taper (FBT) technology, it can be used in split the optical signal power into two parts with even or various coupling ratio and keep the polarization maintaining, it's widely applied in fiber optic sensor, fiber amplifier system and fiber optic diffraction field.

Application:

Fiber Optic Amplifier
 Fiber Optic Sensor
 Fiber Laser
 Optical Diffraction System

Features:

Low Excess Loss
 Low Insertion Loss
 High Extinction Ratio
 High Reliability



Specification:


Parameter		Symbol	Value	Unit
Center Wavelength		λ	1080	nm
Bandwidth		BW	± 15	nm
Max. Excess Loss		EL	0.8	dB
Max. Insertion Loss	50/50 (± 3.5)	IL	3.6/3.6	dB
	40/60 (± 2.5)		5.2/3.1	dB
	30/70 (± 2.5)		5.8/2.0	dB
	20/80 (± 2.0)		8.0/1.5	dB
	10/90 (± 1.2)		11.6/1.2	dB
	5/95 (± 0.8)		14.8/0.8	dB
	3/97 (± 0.7)		17.0/0.5	dB
	2/98 (± 0.6)		18.4/0.4	dB
	1/99 (± 0.4)		22/0.35	dB
Min. Extinction Ratio	For Ratio > 10% Port	ER	20	dB
	For 5% \leq Ratio \leq 10% Port		18	dB
	For Ratio < 5% Port		16	dB
Min. Directivity			50	dB
Min. Return Loss		RL	50	dB
Fiber Type			PM Panda Fiber	-
Max. Tensile Load			5	N
Max. Optical Power (CW)		P	2	W
Operating Temperature		T	-40~75	$^{\circ}\text{C}$
Storage Temperature		T	-40~85	$^{\circ}\text{C}$
Package Dimension			$\Phi 3.0 \times L54$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 $^{\circ}\text{C}$.

For devices with connectors, IL will be 0.3dB higher, EL will be 0.2dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

If need optical power more than 2W CW, please contact us to confirm. Connectors only 1W (Continue Wavelength) optical power guarantee.

Drawing:

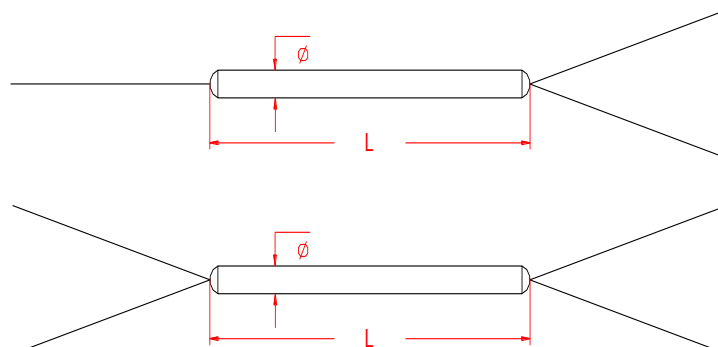

Ordering Information (Part Number):**PMFUC-WWW-PP-A-RR-J-LL-CC**

WWW	PP	A	RR	J	LL	CC
Wavelength	Port	Working Axis	Coupling Ratio	Fiber Jacket	Fiber Length	Connector
1030 - 1030nm	12 - 1x2	B - Both Axes	01 - 1/99	B - 250um Bare Fiber	05 - 0.5m	NE - None
1040 - 1040nm	22 - 2x2	Working	02 - 2/98	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1050 - 1050nm		S - Slow Axis	03 - 3/97		15 - 1.5m	FU - FC/UPC
1053 - 1053nm		Working	05 - 5/95		20 - 2.0m	SA - SC/APC
1060 - 1060nm		F - Fast Axis	10 - 10/90		SS - Specify	SU - SU/APC
1064 - 1064nm		Working	20 - 20/80			LA - LC/APC
1080 - 1080nm			30 - 30/70			LU - LC/UPC
			40 - 40/60			SS - Specify
			50 - 50/50			
			SS - Specify			