

810nm Polarization Beam Combiner/Splitter

810nm Polarization Beam Combiner/Splitter is a fiber passive component which can combine the two orthogonal polarization light into one output fiber or split the orthogonal polarization light to two output fiber, it's widely used in Fiber Amplifier System and Fiber Optic Diffraction field, the high power type is available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Laser System
Fiber Optic Diffraction

Features:

High Extinction Ratio
Low Insertion Loss
Optical Path Reversibility
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	810	nm
Bandwidth	BW	± 20	nm
Typ. Insertion Loss	IL	0.8	dB
Max. Insertion Loss	IL	1.0	dB
Min. Extinction Ratio (For PBS)	ER	20	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	300	mW
Max. Tensile Load		5	N
Fiber Type	For Port 1 and Port 2	PM Panda fiber	-
	For Port 3	PM Panda fiber or HI 780 fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

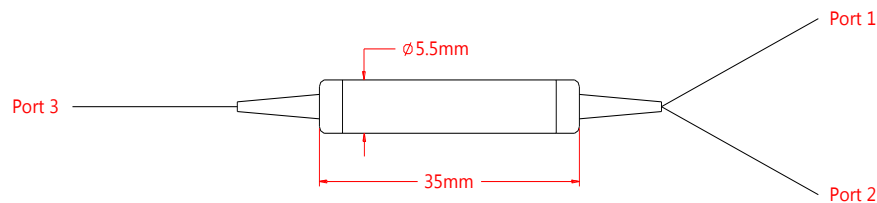

Ordering Information (Part Number):

WWW	FF	J	LL	CC
Wavelength	Fiber Type on Port 3	Fiber Jacket	Fiber Length	Connector
800 - 800nm	H7 - HI 780 Fiber	B - 250um Bare Fiber	05 - 0.5m	NE - None
808 - 808nm	PM - PM Panda Fiber,	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
810 - 810nm	Slow Axis Aligned to Port 1	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
820 - 820nm	P4 - PM Panda Fiber,	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
830 - 830nm	Slow Axis 45° Aligned to Port 1		SS - Specify	SU - SU/APC
850 - 850nm				LA - LC/APC
				LU - LC/UPC
				SS - Specify