

1550nm RC80 1x2 2x2 PM Fiber Fused Coupler

1550nm RC80 1x2, 2x2 Polarization Maintaining (PM) Fused Coupler is built with fused biconical taper (FBT) technology, it can be used in split the optical signal power into two parts with even or various coupling ratio and keep the polarization maintaining, it's widely applied in fiber optic sensor, fiber amplifier system and fiber optic diffraction field.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Optical Diffraction System

Features:

Low Excess Loss
Low Insertion Loss
High Extinction Ratio
High Reliability



Specification:


Parameter		Symbol	Value	Unit
Center Wavelength		λ	1550	nm
Bandwidth		BW	± 15	nm
Max. Excess Loss		EL	0.5	dB
Max. Insertion Loss	50/50 (± 3.5)	IL	3.6/3.6	dB
	40/60 (± 2.5)		5.2/3.1	dB
	30/70 (± 2.5)		5.8/2.0	dB
	20/80 (± 2.0)		8.0/1.5	dB
	10/90 (± 1.2)		11.6/1.2	dB
	5/95 (± 0.8)		14.8/0.8	dB
	3/97 (± 0.7)		17.0/0.5	dB
	2/98 (± 0.6)		18.4/0.4	dB
	1/99 (± 0.4)		22/0.35	dB
Min. Extinction Ratio		ER	18	dB
Min. Directivity			50	dB
Min. Return Loss		RL	50	dB
Fiber Type			PM 1550 RC80 fiber	-
Max. Tensile Load			5	N
Max. Optical Power (CW)		P	2	W
Operating Temperature		T	-40~75	°C
Storage Temperature		T	-40~85	°C
Package Dimension			$\Phi 3.0 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, EL will be 0.2dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

If need optical power more than 2W CW, please contact us to confirm. Connectors only 1W (Continue Wavelength) optical power guarantee.

Drawing:

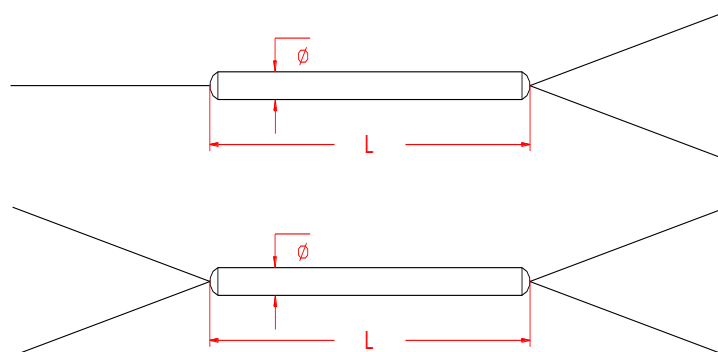

Ordering Information (Part Number):

RPMFUC- WWW - PP - A - RR - J - LL - CC						
WWW	PP	A	RR	J	LL	CC
Wavelength	Port	Working Axis	Coupling Ratio	Fiber Jacket	Fiber Length	Connector
1550 - 1550nm	12 - 1x2 22 - 2x2	B - Both Axes Working S - Slow Axis Working F - Fast Axis Working	01 - 1/99	B - 165um Bare Fiber	05 - 0.5m	NE - None
			02 - 2/98		10 - 1.0m	
			03 - 3/97		15 - 1.5m	
			05 - 5/95		20 - 2.0m	
			10 - 10/90		SS - Specify	
			20 - 20/80			
			30 - 30/70			
			40 - 40/60			
			50 - 50/50			
			SS - Specify			