

## 488nm SM Manual Variable Optical Attenuator

488nm SM Manual Variable Optical Attenuator is a fiber component which can control the attenuation of the optical power by adjusting the screw, the attenuation value can be up to 60dB, it's widely used in optical power testing system, visible application and optical power monitoring field.

### Application:

Optical Power Monitoring  
Visible Application  
Testing System  
Lab And Research

### Features:

Low Original Loss  
High Return Loss  
High Attenuation Range  
High Reliability




### Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	$\lambda$	488	nm
Bandwidth	BW	$\pm 20$	nm
Attenuation Range		1.8-60	dB
Max. Original Loss	IL	1.8	dB
Adjustment Precision		0.02	dB
Max. Polarization Dependent Loss	PDL	0.1	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		460-HP fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		26x18x8	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

### Drawing:

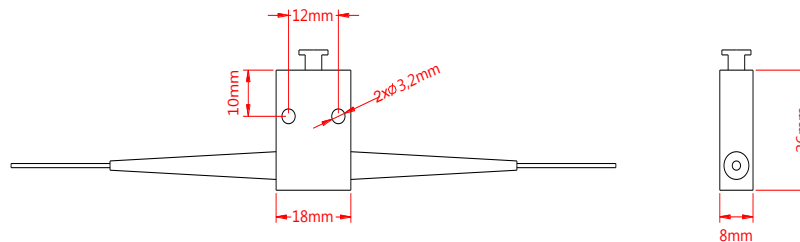

### Ordering Information (Part Number):

SMVOA- <b>WWW</b> - <b>FF</b> - <b>J</b> - <b>LL</b> - <b>CC</b>				
<b>WWW</b>	<b>FF</b>	<b>J</b>	<b>LL</b>	<b>CC</b>
Wavelength	Fiber Type	Fiber Jacket	Fiber Length	Connector
488 - 488nm SSS - Specify	4H - 460-HP SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube 2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify