

1064nm PM Band Pass Filter

1064nm PM Band Pass Filter is a fiber passive component which is based on thin-film filter technology, it can block the unwanted wavelength signal and pass the specific wavelength band. It's widely used in fiber amplifier and fiber laser field, the high power type is also available upon request.

Application:

Fiber Amplifier
Fiber Laser
Fiber Optic Sensor
Lab And Research

Features:

Low Insertion Loss
High Isolation
High Power
High Reliability




Specification:

Parameter	Symbol	Value					Unit
Center Wavelength	λ	1064					nm
Min. Pass Bandwidth @0.5dB	BW	2	2	5	8	8	nm
Max. Stop Bandwidth @25dB	BW	6	10	10	20	30	nm
Max. Insertion Loss	IL	0.9					dB
Min. Isolation	Iso	25					dB
Min. Extinction Ratio	ER	20					dB
Min. Return Loss	RL	50					dB
Max. Optical Power (CW)	P	300					mW
Max. Tensile Load		5					N
Fiber Type		PM 980 Panda fiber					-
Operating Temperature	T	-5~70					°C
Storage Temperature	T	-40~85					°C
Package Dimension		Φ5.5xL35					mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, RL will be 5dB lower, slow axis is default aligned to the connector key.

Drawing:

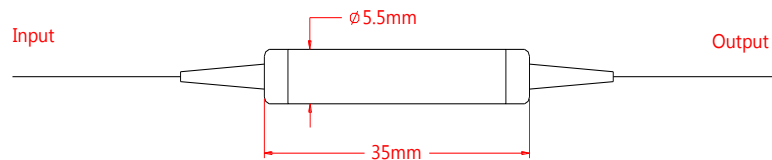

Ordering Information (Part Number):

PMBPF- WWWW -PP-SS-J-LL-CC					
WWWW	PP	SS	J	LL	CC
Wavelength	Pass Band	Stop Band	Fiber Jacket	Fiber Length	Connector
1064 - 1064nm	02 - 2nm 05 - 5nm 06 - 6nm 08 - 8nm 09 - 9nm 25 - 25nm SS - Specify	06 - 6nm 10 - 10nm 12 - 12nm 20 - 20nm 22 - 22nm 30 - 30nm 38 - 38nm SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube 2 - 2.0mm Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify