

High Power 1064/1550nm 1x2 Filter WDM

High Power 1064/1550nm Wavelength Division Multiplexer is a fiber component built with thin-film filter technology, it can be used to separate or combine 1064nm and 1550nm wavelength signal, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the handling power can be customized.

Application:

Fiber Laser
EDFA
Optical Diffraction System
Lab And Research

Features:

High Power
High Isolation
Low Insertion Loss
Optical Path Reversibility




Specification:

Parameter	Symbol	Value	Unit
Type		P1064 R1550 P1550 R1064	nm
Pass Band	λ	1064 (1020-1080) 1550 (1520-1600)	nm
Reflect Band	λ	1550 (1520-1600) 1064 (1020-1080)	nm
Max. Insertion Loss @Pass Channel	IL	0.8	dB
Max. Insertion Loss @Reflect Channel	IL	0.6	dB
Min. Isolation @Pass Channel	Iso	25	dB
Min. Isolation @Reflect Channel	Iso	13	dB
Max. Insertion Loss Temperature Sensitivity		0.5	dB
Max. Polarization Dependent Loss	PDL	0.1	dB
Max. Polarization Mode Dispersion	PMD	0.1	ps
Min. Directivity		55	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	1, 2, 3, 5 or specify	W
Max. Tensile Load		5	N
Fiber Type		SMF-28e or HI 1060 fiber on Pass Port HI 1060 or SMF-28e on Common & Reflect Port	-
Operating Temperature	T	-5~75	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 °C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. connectors only 1W CW optical power guarantee.

Drawing:

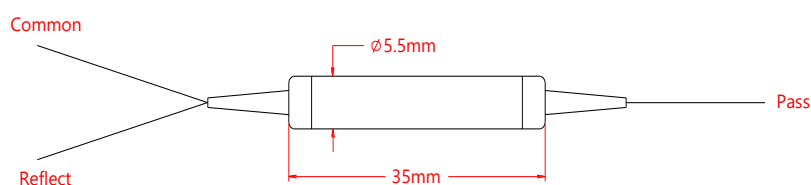

Ordering Information (Part Number):

HPFWDM- WWW/WWW - HH-D-J-LL-CC					
WWW/WWW	HH	D	J	LL	CC
Wavelength	Handling Power	Package Dimension	Fiber Jacket	Fiber Length	Connector
1064/1550 - 1064nm Pass, 1550nm Reflect	01 - 1W 02 - 2W	1 - $\Phi 5.5 \times L35$ mm 2 - 90x20x10mm	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 10 - 1.0m	NE - None FA - FC/APC FU - FC/UPC
1550/1064 - 1550nm Pass, 1064nm Reflect	03 - 3W 05 - 5W SS - Specify	S - Specify	2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	15 - 1.5m 20 - 2.0m SS - Specify	SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify