

1480/1550nm 1x2 Filter WDM

1480/1550 Wavelength Division Multiplexer is a fiber component built with thin-film filter technology, it can be used to separate or combine 1480nm and 1550nm wavelength signal, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the high power type is available upon request.

Application:

Fiber Laser
EDFA
Optical Diffraction System
Lab And Research

Features:

Epoxy Free
High Isolation
Low Insertion Loss
Optical Path Reversibility




Specification:

Parameter	Symbol	Value		Unit
Type		P1480 R1550	P1550 R1480	nm
Pass Band	λ	1480 (1450-1490)	1550 (1530-1600)	nm
Reflect Band	λ	1550 (1530-1600)	1480 (1450-1490)	nm
Max. Insertion Loss @Pass Channel	IL	0.6		dB
Max. Insertion Loss @Reflect Channel	IL	0.4		dB
Min. Isolation @Pass Channel	Iso	30		dB
Min. Isolation @Reflect Channel	Iso	15		dB
Max. Insertion Loss Temperature Sensitivity		0.5		dB
Max. Polarization Dependent Loss	PDL	0.1		dB
Max. Polarization Mode Dispersion	PMD	0.1		ps
Min. Directivity		50		dB
Min. Return Loss	RL	50		dB
Max. Optical Power (CW)	P	500		mW
Max. Tensile Load		5		N
Fiber Type		SMF-28e fiber		-
Operating Temperature	T	-5~75		°C
Storage Temperature	T	-40~85		°C
Package Dimension		Φ5.5×L35		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 °C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

Drawing:

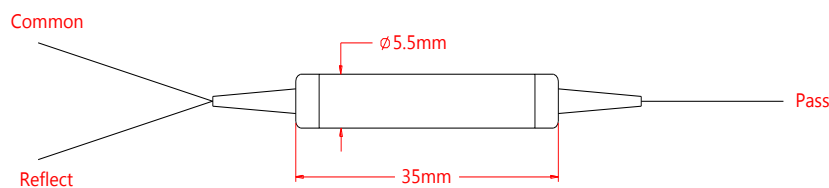

Ordering Information (Part Number):

FWDM- WWW/WWW - D - J - LL - CC				
WWW/WWW	D	J	LL	CC
Wavelength	Package Dimension	Fiber Jacket	Fiber Length	Connector
1480/1550 - 1480nm Pass, 1550nm Reflect	1 - Φ5.5×L35mm 2 - 90x20x10mm S - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 10 - 1.0m	NE - None FA - FC/APC
1550/1480 - 1550nm Pass, 1480nm Reflect		2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	15 - 1.5m 20 - 2.0m SS - Specify	FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify