

## 1064nm PM In-line Phase Shifter

1064nm PM In-line Phase Shifter is built with 45 degree Faraday Rotator and Wave Plate, which can generate a fixed phase difference in the input polarized light, it's widely used in Fiber Laser, Fiber Optic Sensor Optical Imaging field, it features low insertion loss, high extinction ratio, the high power type is available upon request.

### Application:

Fiber Laser  
Fiber Optic Sensor  
Optical Imaging  
Lab And Research

### Features:

Low Insertion Loss  
High Extinction Ratio  
High Power  
High Reliability




### Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	$\lambda$	1064	nm
Bandwidth	BW	10	nm
Max. Insertion Loss	IL	1.8	dB
Min. Extinction Ratio	ER	20	dB
Optical Phase Shifter		$\pi/2$	
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500 or specify	mW
Max. Tensile Load		5	N
Fiber Type		PM 980 Panda fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

### Drawing:

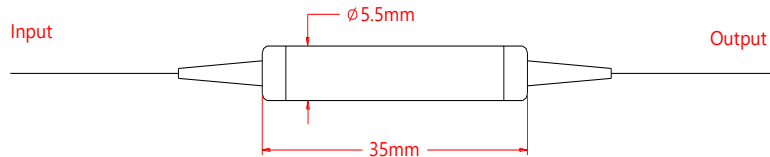

### Ordering Information (Part Number):

PMPS- <b>WWW</b> - <b>SS</b> - <b>J</b> - <b>LL</b> - <b>CC</b>				
<b>WWW</b>	<b>SS</b>	<b>J</b>	<b>LL</b>	<b>CC</b>
Wavelength	Phase Shift	Fiber Jacket	Fiber Length	Connector
1064 - 1064nm SSSS - Specify	P2 - $\pi/2$ SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify