

## 980nm 1x2 2x2 SM Fiber Fused Coupler

980nm 1x2, 2x2 SM Fused Coupler is built with fused biconical taper (FBT) technology, optical signal power can be splitted into two parts with even or various coupling ratio by the FBT Coupler, it's widely applied in fiber optic transmission and fiber optic sensor field, the MM and PM types are available upon request.

### Application:

Optical Signal Transmission  
Fiber Optic Sensor  
Fiber Amplifier  
Optical Diffraction System

### Features:

Low Excess Loss  
High Return Loss  
Low Insertion Loss  
High Reliability




### Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	$\lambda$	980	nm
Bandwidth	BW	$\pm 10$	nm
Max. Excess Loss	EL	0.1	dB
Max. Insertion Loss	50/50	3.6/3.6	dB
	40/60	4.8/2.8	dB
	30/70	6.1/2.0	dB
	20/80	8.0/1.3	dB
	10/90	12.0/0.8	dB
	5/95	13.8/0.4	dB
	3/97	19.0/0.4	dB
	2/98	20.0/0.3	dB
	1/99	22.0/0.3	dB
Max. Polarization Dependent Loss	PDL	0.15	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Fiber Type		HI 1060, HI 1060 flex, OFS980 fiber	-
Max. Tensile Load		5	N
Max. Optical Power (CW)	P	2	W
Operating Temperature	T	-40~75	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 3.0 \times L40$ for Bare Fiber $\Phi 3.0 \times L54$ for Bare Fiber or 900um Loose Tube 90x20x10 for 2.0 or 3.0mm Loose Tube 100x80x10 for 2.0 or 3.0mm Loose Tube	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, Connectors only 1W CW optical power guarantee.

### Drawing:

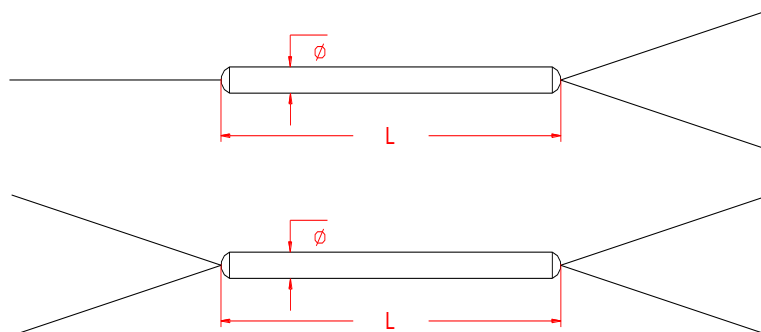

**Ordering Information (Part Number):****SMFUC-~~WWW~~-~~PP~~-~~RR~~-~~FF~~-~~D~~-~~J~~-~~LL~~-~~CC~~**

<b>WWW</b>	<b>PP</b>	<b>RR</b>	<b>FF</b>	<b>D</b>	<b>J</b>	<b>LL</b>	<b>CC</b>
<b>Wavelength</b>	<b>Port</b>	<b>Coupling Ratio</b>	<b>Fiber Type</b>	<b>Package Dimension</b>	<b>Fiber Jacket</b>	<b>Fiber Length</b>	<b>Connector</b>
915 - 915nm	12 - 1x2	01 - 1/99	O9 - OFS980	1 - $\Phi$ 3.0x40mm	B - 250um Bare Fiber	05 - 0.5m	NE - None
930 - 930nm	22 - 2x2	02 - 2/98	H1 - HI 1060	2 - $\Phi$ 3.0x54mm	9 - 900um Loose	10 - 1.0m	FA - FC/APC
940 - 940nm		03 - 3/97	HF - HI 1060	3 - 90x20x10mm	Tube	15 - 1.5m	FU - FC/UPC
950 - 950nm		05 - 5/95	Flex	4 - 100x80x10mm	2 - 2.0mm Loose	20 - 2.0m	SA - SC/APC
975 - 975nm		10 - 10/90	SS - Specify		Tube	SS - Specify	SU - SU/APC
980 - 980nm		20 - 20/80			3 - 3.0mm Loose		LA - LC/APC
		30 - 30/70			Tube		LU - LC/UPC
		40 - 40/60					SS - Specify
		50 - 50/50					
		SS - Specify					