

975nm PM Fiber Mirror Reflector

975nm PM Fiber Mirror Reflector is a fiber component which can reflect the input polarization light with polarization state maintaining by the built inside planar mirror, the reflection light can be up to 90%. It's widely used in Fiber Laser, Fiber Amplifier System and Fiber Optic Sensor.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab And Research

Features:

High Extinction Ratio
High Power Available
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	975	nm
Bandwidth	BW	± 30	nm
Typ. Insertion Loss	IL	0.5	dB
Max. Insertion Loss	IL	0.7	dB
Min. Extinction Ratio	ER	20	dB
Max. Optical Power (CW)	P	300	mW
Max. Tensile Load		5	N
Fiber Type		PM Panda fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

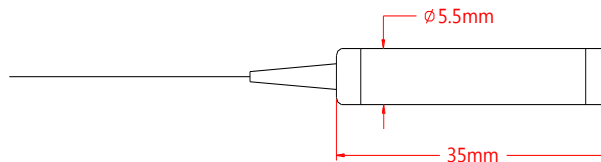

Ordering Information (Part Number):

PMFMR- WWW - J - LL - CC			
WWW	J	LL	CC
Wavelength	Fiber Jacket	Fiber Length	Connector
915 - 915nm	B - 250um Bare Fiber	05 - 0.5m	NE - None
930 - 930nm	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
940 - 940nm	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
950 - 950nm	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
975 - 975nm		SS - Specify	SU - SU/APC
980 - 980nm			LA - LC/APC
			LU - LC/UPC
			SS - Specify