

780±20nm Broadband PM Fiber Optic Isolator

780±20nm Broadband Polarization Maintaining Optical Isolator is a fiber passive component built with TGG crystal, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in amplifier system, fiber optic sensor system to protect the light source and lower down the system optical signal noise. The higher power type is available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab And Research

Features:

High Isolation
Wide Band
High Extinction Ratio
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	780	nm
Bandwidth	BW	±20	nm
Typ. Insertion Loss	IL	0.9	dB
Max. Insertion Loss	IL	1.5	dB
Typ. Peak Isolation	Iso	32	dB
Min. Isolation	Iso	28	dB
Min. Extinction Ratio for Fast Axis Blocked	ER	20	dB
Min. Extinction Ratio for Both Axes Working	ER	18	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500 (higher power is available)	mW
Max. Tensile Load		5	N
Fiber Type		PM Panda fiber	-
Operating Temperature	T	+5~65	°C
Storage Temperature	T	-40~85	°C
Package Dimension			mm

Notice: Above specifications are tested without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

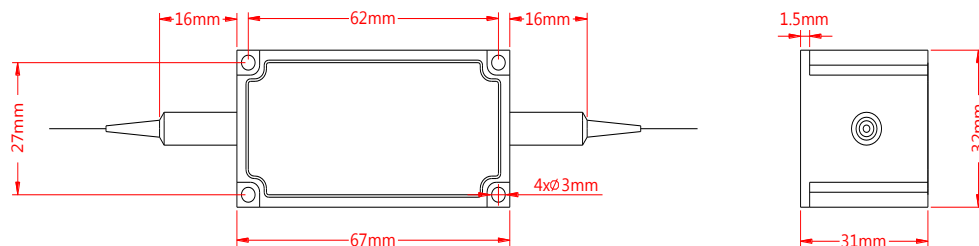

Ordering Information (Part Number):

BPMISO- WWW - A - J - LL - CC				
WWW	A	J	LL	CC
Wavelength	Working Axis	Fiber Jacket	Fiber Length	Connector
780 - 780nm	F - Fast Axis Blocked Slow Axis Working	B - 250um Bare Fiber	05 - 0.5m	NE - None
785 - 785nm		9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
790 - 790nm	B - Both Axes Working		15 - 1.5m	FU - FC/UPC
793 - 793nm			20 - 2.0m	SA - SC/APC
SSS - Specify			SS - Specify	SU - SU/APC
				LA - LC/APC
				LU - LC/UPC
				SS - Specify