

980/1064nm 1x2 Filter WDM

980/1064nm Wavelength Division Multiplexer is a fiber component built with thin-film filter technology, it can be used to separate or combine 980nm and 1064nm wavelength signal, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the high power type is available upon request.

Application:

Fiber Laser
EDFA
Optical Diffraction System
Lab And Research

Features:

Epoxy Free
High Isolation
Low Insertion Loss
Optical Path Reversibility




Specification:

Parameter	Symbol	Value		Unit
Type		P980 R1064	P1064 R980	nm
Pass Band	λ	980 (960-990)	1064 (1020-1080)	nm
Reflect Band	λ	1064 (1020-1080)	980 (960-990)	nm
Max. Insertion Loss @Pass Channel	IL	0.8		dB
Max. Insertion Loss @Reflect Channel	IL	0.6		dB
Min. Isolation @Pass Channel	Iso	30		dB
Min. Isolation @Reflect Channel	Iso	13		dB
Max. Insertion Loss Temperature Sensitivity		0.5		dB
Max. Polarization Dependent Loss	PDL	0.1		dB
Max. Polarization Mode Dispersion	PMD	0.1		ps
Min. Directivity		50		dB
Min. Return Loss	RL	50		dB
Max. Optical Power (CW)	P	500		mW
Max. Tensile Load		5		N
Fiber Type		HI 1060		-
Operating Temperature	T	-5~75		°C
Storage Temperature	T	-40~85		°C
Package Dimension		Φ5.5×L35		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

Drawing:

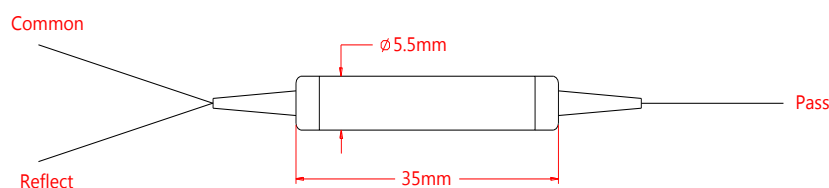

Ordering Information (Part Number):

FWDM- WWW/WWW - D - J - LL - CC				
WWW/WWW	D	J	LL	CC
Wavelength	Package Dimension	Fiber Jacket	Fiber Length	Connector
980/1064 - 980nm Pass, 1064nm Reflect	1 - Φ5.5×L35mm 2 - 90x20x10mm S - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube 2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify
1064/980 - 1064nm Pass, 980nm Reflect				