

1064nm Polarization Beam Combiner/Splitter

1064nm Polarization Beam Combiner/Splitter is a fiber passive component which can combine the two orthogonal polarization light into one output fiber or split the orthogonal polarization light to two output fiber, it's widely used in Fiber Amplifier System and Fiber Optic Diffraction field, the high power type is available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Laser System
Fiber Optic Diffraction

Features:

High Extinction Ratio
Low Insertion Loss
Optical Path Reversibility
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1064	nm
Bandwidth	BW	± 20	nm
Typ. Insertion Loss	IL	0.6	dB
Max. Insertion Loss	IL	0.8	dB
Min. Extinction Ratio (For PBS)	ER	22	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	300	mW
Max. Tensile Load		5	N
Fiber Type	For Port 1 and Port 2	PM Panda fiber	-
	For Port 3	PM Panda fiber or HI 1060 fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

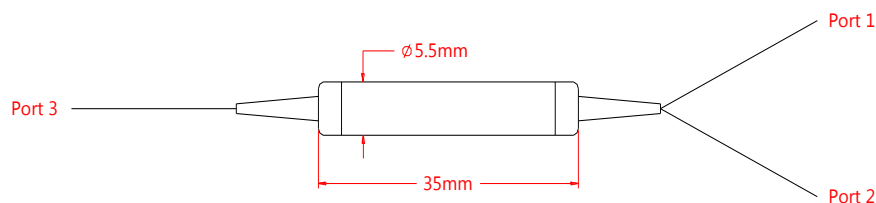

Ordering Information (Part Number):

PBCS-**WWW**-**FF**-**J**-**LL**-**CC**

WWW	FF	J	LL	CC
Wavelength	Fiber Type on Port 3	Fiber Jacket	Fiber Length	Connector
1030 - 1030nm	H1 - HI 1060 Fiber	B - 250um Bare Fiber	05 - 0.5m	NE - None
1040 - 1040nm	PM - PM Panda Fiber, Slow Axis Aligned to Port 1	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1050 - 1050nm		2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
1053 - 1053nm	P4 - PM Panda Fiber, Slow Axis 45° Aligned to Port 1	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
1060 - 1060nm			SS - Specify	SU - SU/APC
1064 - 1064nm				LA - LC/APC
1080 - 1080nm				LU - LC/UPC
				SS - Specify