

## High Power 810nm Multimode Optical Isolator

High Power 810nm Multimode Optical Isolator is a fiber passive component built with TGG crystal, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in amplifier system, fiber optic sensor system to protect the light source and lower down the system optical signal noise. The higher power type is available upon request, if need pulse type please contact us to confirm.

### Application

Fiber Amplifier  
Fiber Optic Sensor  
Fiber Laser  
Lab & Research

### Features:

High Isolation  
High Power  
Low Insertion Loss  
High Reliability




### Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	$\lambda$	810	nm
Bandwidth	BW	$\pm 5$	nm
Typ. Insertion Loss	IL	0.9	dB
Max. Insertion Loss	IL	1.5	dB
Typ. Peak Isolation	Iso	25	dB
Min. Isolation	Iso	20	dB
Min. Return Loss	RL	30	dB
Max. Optical Power (CW)	P	0.5, 1 or customized	W
Max. Peak Power	P	5, 10 or customized	kW
Max. Tensile Load		5	N
Fiber Type		50/125, 62.5/125, 105/125 MM fiber	-
Operating Temperature	T	+5~60	$^{\circ}\text{C}$
Storage Temperature	T	-20~75	$^{\circ}\text{C}$
Package Dimension			mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 $^{\circ}\text{C}$ .

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Connectors only 1W CW guarantee.

### Drawing:

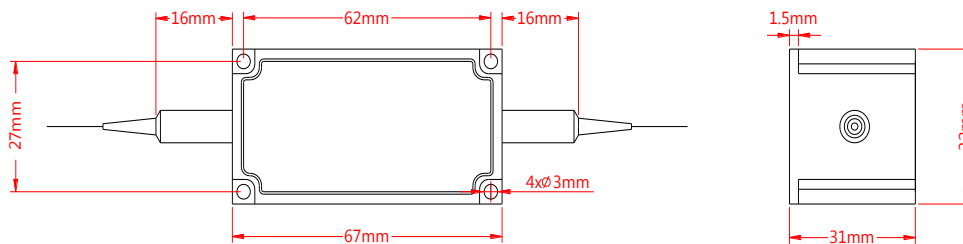

### Ordering Information (Part Number):

HMMISO-**WWW**-**HH**-**FF**-**S**-**J**-**LL**-**CC**

<b>WWW</b>	<b>HH</b>	<b>FF</b>	<b>J</b>	<b>LL</b>	<b>CC</b>
Wavelength	Handling Power	Fiber Type	Fiber Jacket	Fiber Length	Connector
808 - 808nm	Z5 - 0.5W	M5 - 50/125um	B - 250um Bare Fiber	05 - 0.5m	NE - None
810 - 810nm	01 - 1W	M6 - 62.5/125um	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
SSS - Specify	SS - Specify	M1 - 105/125um		15 - 1.5m	FU - FC/UPC
		SS - Specify		20 - 2.0m	SA - SC/APC
				SS - Specify	SU - SU/APC
					LA - LC/APC
					LU - LC/UPC
					SS - Specify