

532nm 1x2 2x2 SM Fiber Fused Coupler

532nm 1x2, 2x2 SM Fused Coupler is built with fused biconical taper (FBT) technology, optical signal power can be splitted into two parts with even or various coupling ratio by the FBT Coupler, it's widely applied in fiber optic transmission and fiber optic sensor field, the MM and PM types are available upon request.

Application:

Optical Signal Transmission
Fiber Optic Sensor
Fiber Amplifier
Optical Diffraction System

Features:

Low Excess Loss
High Return Loss
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	532	nm
Bandwidth	BW	± 10	nm
Max. Excess Loss	EL	0.2	dB
Max. Insertion Loss	50/50	3.8/3.8	dB
	40/60	5.0/3.1	dB
	30/70	6.2/2.4	dB
	20/80	8.0/1.8	dB
	10/90	11.0/1.3	dB
	5/95	14.5/1.1	dB
	3/97	19.0/1.05	dB
	2/98	18/0.9	dB
1/99	21.0/0.9	dB	
Max. Polarization Dependent Loss	PDL	0.2	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Fiber Type		460-HP fiber	-
Max. Tensile Load		5	N
Max. Optical Power (CW)	P	2	W
Operating Temperature	T	-40~75	$^{\circ}\text{C}$
Storage Temperature	T	-40~85	$^{\circ}\text{C}$
Package Dimension		$\Phi 3.0 \times L40$ for Bare Fiber $\Phi 3.0 \times L54$ for Bare Fiber or 900um Loose Tube 90x20x10 for 2.0 or 3.0mm Loose Tube 100x80x10 for 2.0 or 3.0mm Loose Tube	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 $^{\circ}\text{C}$.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, Connectors only 1W CW optical power guarantee.

Drawing:

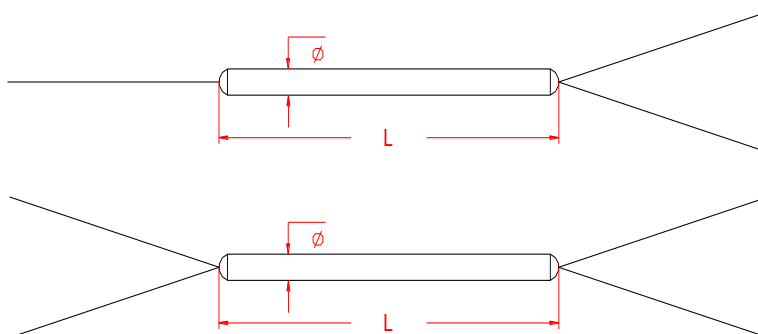

Ordering Information (Part Number):**SMFUC-*WWW-PP-RR-FF-D-J-LL-CC***

WWW	PP	RR	FF	D	J	LL	CC
Wavelength	Port	Coupling Ratio	Fiber Type	Package Dimension	Fiber Jacket	Fiber Length	Connector
532 - 532nm	12 - 1x2	01 - 1/99	4H - 460-HP	1 - Φ 3.0x40mm	B - 250um Bare Fiber	05 - 0.5m	NE - None
	22 - 2x2	02 - 2/98	SS - Specify	2 - Φ 3.0x54mm	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
		03 - 3/97		3 - 90x20x10mm	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
		05 - 5/95		4 - 100x80x10mm		20 - 2.0m	SA - SC/APC
		10 - 10/90		3 - 3.0mm Loose Tube	SS - Specify	SU - SU/APC	
		20 - 20/80				LA - LC/APC	
		30 - 30/70				LU - LC/UPC	
		40 - 40/60				SS - Specify	
		50 - 50/50					
		SS - Specify					