

## 440/532nm 1x2 Fused WDM

440/532nm Fused Wavelength Division Multiplexer is a fiber component built with FBT technology, it can be used to separate or combine 440nm and 532nm wavelength signal, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the high power type is available upon request.

### Application:

Fiber Laser  
EDFA  
Optical Diffraction System  
Lab And Research

### Features:

Epoxy Free  
High Isolation  
Low Insertion Loss  
Optical Path Reversibility




### Specification:

Parameter	Symbol	Value	Unit
Wavelength	$\lambda$	440/532	nm
Bandwidth	BW	440±5/532±5	nm
Max. Insertion Loss	IL	1.0	dB
Min. Isolation	Iso	15	dB
Max. Polarization Dependent Loss	PDL	0.2	dB
Min. Directivity		55	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	2	W
Max. Tensile Load		5	N
Fiber Type		460-HP	-
Operating Temperature	T	-40~85	°C
Storage Temperature	T	-40~85	°C
Package Dimension		Φ3.0×L54	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, Connectors only 1W CW optical power guarantee.

### Drawing:

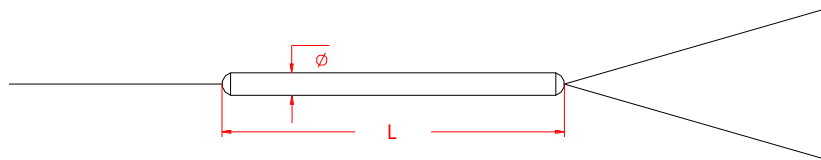

### Ordering Information (Part Number):

FUWDM- <b>WWW/WWW-PP-FF-D-J-LL-CC</b>						
<b>WWW/WWW</b>	<b>PP</b>	<b>FF</b>	<b>D</b>	<b>J</b>	<b>LL</b>	<b>CC</b>
Wavelength	Port	Fiber Type	Package Dimension	Fiber Jacket	Fiber Length	Connector
440/532 - 440/532nm	12 - 1x2 22 - 2x2	H4 - 460 HP SS - Specify	1 - Φ3.0×L54mm A - 90x20x10mm S - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube 2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify