

1760nm High Power PM Fiber Optic Isolator

1760nm High Power Polarization Maintaining (PM) Optical Isolator is a fiber passive component built with PM fiber, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in amplifier system, fiber optic sensor system to protect the light source and lower down the optical signal noise. If need pulsed type please tell us to confirm

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab And Research

Features:

High Power
High Isolation
Low Insertion Loss
High Reliability



Specification:


Parameter	Symbol	Value	Unit
Center Wavelength	λ	1760	nm
Bandwidth	BW	± 10	nm
Typ. Insertion Loss	IL	1.2	dB
Max. Insertion Loss	IL	1.5	dB
Typ. Peak Isolation	Iso	35	dB
Min. Isolation	Iso	30	dB
Min. Extinction Ratio	ER	18	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	1, 3, 5, 10 or specify	W
Max. Peak Power	P	5, 10 or specify	KW
Max. Tensile Load		5	N
Fiber Type		PM Panda fiber	-
Operating Temperature	T	-5~70	$^{\circ}\text{C}$
Storage Temperature	T	-40~85	$^{\circ}\text{C}$
Package Dimension		$\Phi 5.5 \times L38$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 $^{\circ}\text{C}$.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower.

Slow axis is default aligned to the connector key. Connectors only 1W CW optical power guarantee.

Drawing:

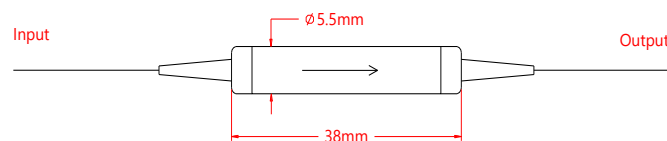

Ordering Information (Part Number):

HPMISO-*WWW*-*A*-*HH*-*J*-*LL*-*CC*

<i>WWW</i>	<i>A</i>	<i>HH</i>	<i>J</i>	<i>LL</i>	<i>CC</i>
Wavelength	Working Axis	Handling Power	Fiber Jacket	Fiber Length	Connector
1700 - 1700nm	F - Fast Axis Blocked Slow Axis Working	01 - 1W	B - 250um Bare Fiber	05 - 0.5m	NE - None
1720 - 1720nm		03 - 3W	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1750 - 1750nm	B - Both Axes Working	05 - 5W	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
1760 - 1760nm		SS - Specify	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
1780 - 1780nm			SS - Specify	SS - Specify	SU - SU/APC
SSSS - Specify					LA - LC/APC LU - LC/UPC SS - Specify