

1064nm 3-port Polarization Insensitive Optical Circulator

1064nm 3-port Polarization Insensitive Optical Circulator is a fiber passive component built with SM fiber, which can change signal light transmission path, the signal can be delivered from Port 1 to Port 2, the other signal light from Port 2 to Port 3, the high isolation can block the back reflection light. It's widely used in Fiber Optic Sensor, Testing System and Coherent Detecting field.

Application:

Fiber Optic Sensor
Testing System
Coherent Detecting
Fiber Optic Amplifier

Features:

Low PDL
High Isolation
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1064	nm
Bandwidth	BW	± 5	nm
Typ. Insertion Loss (Port 1 to 2, 2 to 3)	IL	1.8	dB
Max. Insertion Loss (Port 1 to 2, 2 to 3)	IL	2.1	dB
Typ. Isolation (Port 2 to 1, 3 to 2)	Iso	30	dB
Min. Isolation (Port 2 to 1, 3 to 2)	Iso	25	dB
Max. Polarization Dependent Loss	PDL	0.2	dB
Max. Polarization Mode Dispersion	PMD	0.1	ps
Min. Cross Talk	Ct	45	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	300	mW
Max. Tensile Load		5	N
Fiber Type		HI 1060 fiber	-
Operating Temperature	T	0~50	$^{\circ}\text{C}$
Storage Temperature	T	-40~85	$^{\circ}\text{C}$
Package Dimension		L34xW8.4xH8.4	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 $^{\circ}\text{C}$.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

Drawing:

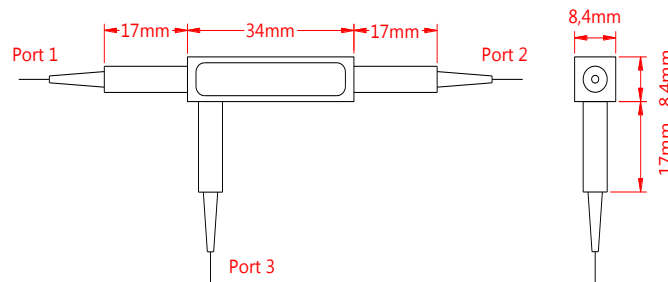

Ordering Information (Part Number):

PICIR-**WWW**-**P**-**J**-**LL**-**CC**

WWW	P	J	LL	CC
Wavelength	Port	Fiber Jacket	Fiber Length	Connector
1060 - 1060nm	3 - 3 Ports	B - 250um Bare Fiber	05 - 0.5m	NE - None
1064 - 1064nm		9 - 900um Loose Tube	10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify