

918nm High Power Uniform FBG


918nm High Power Uniform FBG is built for high power laser or amplifier systems, it can be used for dispersion compensation and filter out the ASE noise for the systems, compared to the Chirped FBG, Uniform FBG has a narrow bandwidth, the handling power will be lower. The parameter can be customized upon request.

Application:

Fiber Laser
EDFA
Fiber Optic Sensor
Lab And Research

Features:

Low Insertion Loss
High Power
High SMSR
High Reliability & Stability




Specification:

Parameter	Symbol	Value		Unit
Center Wavelength	λ	918		nm
Tolerance		$\pm 1, \pm 0.5, \pm 0.1$ or specify		nm
Wavelength matching accuracy		0.2		nm
Filter Type		High Reflector	Output Coupler	-
Reflectivity		99-99.9 (± 2)	6-98 (± 2)	%
Max. 3dB Bandwidth		0.2-0.7	0.1-0.3	nm
Bandwidth Tolerance		± 0.1	± 0.1	nm
Min. SMSR	SMSR	20	10	dB
Grating Regions Length		1-30		mm
Max. Handling Power	P	10, 30, 50, 100, 500		W
Min. Tensile Strength		100		kpsi
Fiber Type		20/400, 25/400 DC Fiber or specify		-
Recoating		UV Cured Acrylate or specify		-
Operating Temperature	T	-20~75		$^{\circ}\text{C}$
Storage Temperature	T	-40~85		$^{\circ}\text{C}$
Package Dimension		Bare Fiber or 70x12x8		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 $^{\circ}\text{C}$.

Drawing:

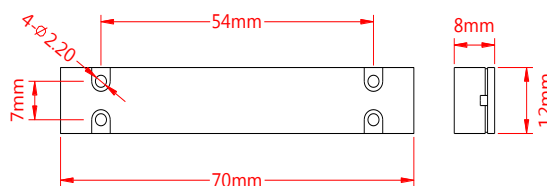

Ordering Information (Part Number):

HPUFBG- WWW - FF - BB - RR - HH - FF - LL						
WWW	FF	BB	RR	HH	FF	LL
Wavelength	Filter Type	Bandwidth	Reflectivity	Handling Power	Fiber Type	Fiber Length
808 - 808nm	HR - High Reflector	Z2 - 0.2nm	06 - 6%	10 - 10W	20 - 20/400 DC Fiber	05 - 0.5m
850 - 850nm	OC - Output Coupler	Z3 - 0.3nm	98 - 98%	30 - 30W	25 - 25/400DC Fiber	08 - 0.8m
918 - 918nm		Z4 - 0.4nm	99 - 99%	50 - 50W		10 - 1.0m
940 - 940nm		Z5 - 0.5nm	99.9 - 99.9%	100 - 100W	SS - Specify	15 - 1.5m
975 - 975nm		Z6 - 0.6nm	SS - Specify	500 - 500W		20 - 2.0m
980 - 980nm		Z7 - 0.7nm		SS - Specify		SS - Specify
SSS - Specify		SS - Specify				