

High Power 980/1064nm 1x2 Filter WDM

High Power 980/1064nm Wavelength Division Multiplexer is a fiber component built with thin-film filter technology, it can be used to separate or combine 980nm and 1064nm wavelength signal, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the handling power can be customized.

Application:

Fiber Laser
EDFA
Optical Diffraction System
Lab And Research

Features:

High Power
High Isolation
Low Insertion Loss
Optical Path Reversibility




Specification:

Parameter	Symbol	Value	Unit	
Type		P980 R1064	P1064 R980	nm
Pass Band	λ	980 (960-990)	1064 (1020-1080)	nm
Reflect Band	λ	1064 (1020-1080)	980 (960-990)	nm
Max. Insertion Loss @Pass Channel	IL	0.8		dB
Max. Insertion Loss @Reflect Channel	IL	0.6		dB
Min. Isolation @Pass Channel	Iso	30		dB
Min. Isolation @Reflect Channel	Iso	15		dB
Max. Insertion Loss Temperature Sensitivity		0.5		dB
Max. Polarization Dependent Loss	PDL	0.1		dB
Max. Polarization Mode Dispersion	PMD	0.1		ps
Min. Directivity		55		dB
Min. Return Loss	RL	50		dB
Max. Optical Power (CW)	P	1, 2, 3, 5 or specify		W
Max. Tensile Load		5		N
Fiber Type		HI 1060		-
Operating Temperature	T	-5~75		°C
Storage Temperature	T	-40~85		°C
Package Dimension		$\Phi 5.5 \times L35$		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 °C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. connectors only 1W CW optical power guarantee.

Drawing:

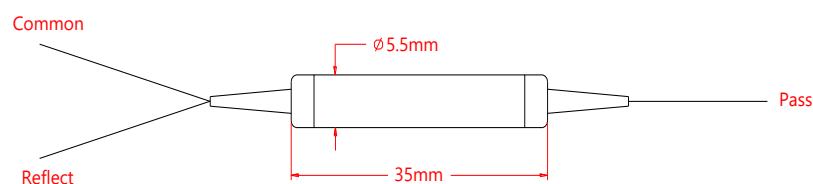

Ordering Information (Part Number):

HPFWDM- WWW/WWW -HH-D-J-LL-CC					
WWW/WWW	HH	D	J	LL	CC
Wavelength	Handling Power	Package Dimension	Fiber Jacket	Fiber Length	Connector
980/1064 - 980nm Pass, 1064nm Reflect	01 - 1W 02 - 2W	1 - $\Phi 5.5 \times L35$ mm 2 - 90x20x10mm	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 10 - 1.0m	NE - None FA - FC/APC
1064/980 - 1064nm Pass, 980nm Reflect	03 - 3W 05 - 5W SS - Specify	S - Specify	2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	15 - 1.5m 20 - 2.0m SS - Specify	FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify