

633/780nm 1x2 PM Fused WDM

633/780nm PM Fused Wavelength Division Multiplexer is a fiber component built with FBT technology, it can be used to separate or combine 633nm and 780nm wavelength signal with PM Panda fiber, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the high power type is available upon request.

Application:

Fiber Laser
EDFA
Optical Diffraction System
Lab And Research

Features:

Epoxy Free
High Isolation
Low Insertion Loss
Optical Path Reversibility



Specification:


Parameter	Symbol	Value	Unit
Wavelength	λ	633/780	nm
Bandwidth	BW	633±5/780±5	nm
Max. Insertion Loss	IL	1.0	dB
Min. Isolation	Iso	18	dB
Min. Extinction Ratio	ER	18	dB
Min. Directivity		55	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	2	W
Max. Tensile Load		5	N
Fiber Type		PM Panda Fiber	-
Operating Temperature	T	-40~85	°C
Storage Temperature	T	-40~85	°C
Package Dimension		Φ3.0×L54	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

Connectors only 1W CW guarantee.

Drawing:

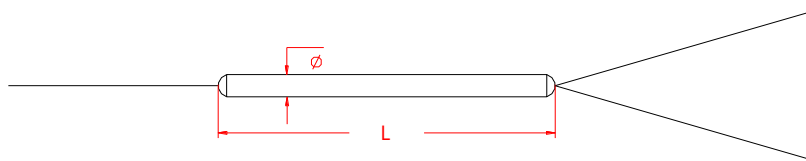

Ordering Information (Part Number):

PFUWDM- WWW/WWW -PP-FF-J-LL-CC					
WWW/WWW	PP	FF	J	LL	CC
Wavelength	Port	Fiber Type	Fiber Jacket	Fiber Length	Connector
633/780 - 633/780nm	12 - 1x2	P6 - PM 630-HP Fiber	B - 250um Bare Fiber	05 - 0.5m	NE - None
635/780 - 635/780nm	22 - 2x2	SS - Specify	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
650/780 - 650/780nm				15 - 1.5m	FU - FC/UPC
				20 - 2.0m	SA - SC/APC
				SS - Specify	SU - SU/APC
					LA - LC/APC
					LU - LC/UPC
					SS - Specify