

793/2000nm 1x2 PM Fused WDM

793/2000nm PM Fused Wavelength Division Multiplexer is a fiber component built with FBT technology, it can be used to separate or combine 793nm and 2000nm wavelength signal with PM Panda fiber, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the high power type is available upon request.

Application:

Fiber Laser
EDFA
Optical Diffraction System
Lab And Research

Features:

Epoxy Free
High Isolation
Low Insertion Loss
Optical Path Reversibility



Specification:


Parameter	Symbol	Value	Unit
Wavelength	λ	793/2000	nm
Bandwidth	BW	793 \pm 15/2000 \pm 15	nm
Max. Insertion Loss	IL	0.7	dB
Min. Isolation	Iso	13	dB
Min. Extinction Ratio	ER	18	dB
Min. Directivity		55	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	2	W
Max. Tensile Load		5	N
Fiber Type		PM Panda Fiber	-
Operating Temperature	T	-40~85	°C
Storage Temperature	T	-40~85	°C
Package Dimension		Φ 3.0 \times L54	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

Connectors only 1W CW guarantee.

Drawing:

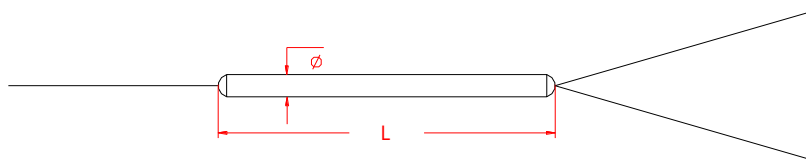

Ordering Information (Part Number):

PFUWDM- WWW/WWW - PP - FF - J - LL - CC					
WWW/WWW	PP	FF	J	LL	CC
Wavelength	Port	Fiber Type	Fiber Jacket	Fiber Length	Connector
793/2000 - 793/2000nm	12 - 1x2 22 - 2x2	P5 - PM 1550 Fiber P9 - PM 1950 Fiber SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify