

930nm SM Manual Variable Optical Attenuator

930nm SM Manual Variable Optical Attenuator is a fiber component which can control the attenuation of the optical power by adjusting the screw, the attenuation value can be up to 60dB, it's widely used in optical power testing system, fiber line protection and optical power monitoring field.

Application:

Optical Power Monitoring
Fiber Line Protection
Testing System
Lab And Research

Features:

Low Original Loss
High Return Loss
High Attenuation Range
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	930	nm
Bandwidth	BW	± 20	nm
Attenuation Range		0.8-60	dB
Max. Original Loss	IL	0.8	dB
Adjustment Precision		0.02	dB
Max. Polarization Dependent Loss	PDL	0.1	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		HI 1060 fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		26x18x8	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

Drawing:

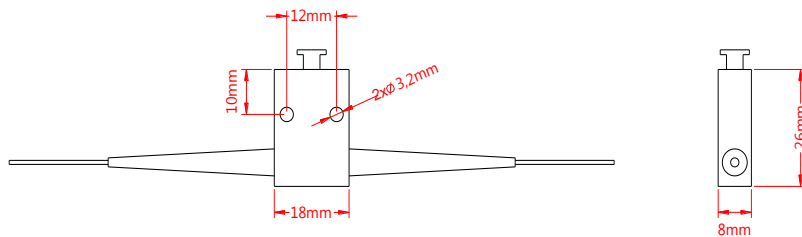

Ordering Information (Part Number):

SMVOA- WWW - FF - J - LL - CC				
WWW	FF	J	LL	CC
Wavelength	Fiber Type	Fiber Jacket	Fiber Length	Connector
915 - 915nm	H1 - HI 1060	B - 250um Bare Fiber	05 - 0.5m	NE - None
930 - 930nm	SS - Specify	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
940 - 940nm		2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
950 - 950nm		3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
975 - 975nm			SS - Specify	SU - SU/APC
980 - 980nm				LA - LC/APC
				LU - LC/UPC
				SS - Specify