

1036nm PM Band Pass Filter

1036nm PM Band Pass Filter is a fiber passive component which is based on thin-film filter technology, it can block the unwanted wavelength signal and pass the specific wavelength band. It's widely used in fiber amplifier and fiber laser field, the high power type is also available upon request.

Application:

Fiber Amplifier
Fiber Laser
Fiber Optic Sensor
Lab And Research

Features

Low Insertion Loss
High Isolation
High Power
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1036	nm
Min. Pass Bandwidth @0.5dB	BW	12 30	nm
Max. Stop Bandwidth @25dB	BW	30 50	nm
Max. Insertion Loss	IL	1.2	dB
Min. Isolation	Iso	25	dB
Min. Extinction Ratio	ER	20	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	300	mW
Max. Tensile Load		5	N
Fiber Type		PM 980 Panda fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		Φ5.5xL35	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, RL will be 5dB lower, slow axis is default aligned to the connector key.

Drawing:

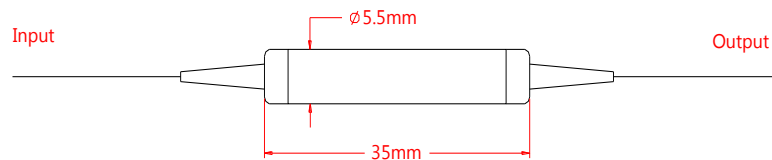

Ordering Information (Part Number):

PMBPF- WWWW - PP - SS - J - LL - CC					
WWWW	PP	SS	J	LL	CC
Wavelength	Pass Band	Stop Band	Fiber Jacket	Fiber Length	Connector
1036 - 1036nm	12 - 12nm	30 - 30nm	B - 250um Bare Fiber	05 - 0.5m	NE - None
SSSS - Specify	30 - 30nm	50 - 50nm	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
	SS - Specify	SS - Specify	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
				20 - 2.0m	SA - SC/APC
				SS - Specify	SU - SU/APC
					LA - LC/APC
					LU - LC/UPC
					SS - Specify