

## 1550nm 1x2 2x2 MM Fiber Filter Coupler

1550nm 1x2, 2x2 MM Filter Coupler is built with thin-film filter technology. optical signal power can be splitted into two parts with even or various coupling ratio by the Filter Coupler, it's widely applied in fiber optic transmission and fiber optic sensor field, the high power type is available upon request.

### Application:

Optical Signal Transmission  
Fiber Optic Sensor  
Testing System  
Optical Diffraction System

### Features:

Low Excess Loss  
High Return Loss  
Low Insertion Loss  
High Reliability




### Specification:

Parameter	Symbol	Value		Unit
Center Wavelength	$\lambda$	1550		nm
Bandwidth	BW	$\pm 40$		nm
Configuration		1x2	2x2	dB
Max. Excess Loss	EL	0.8	1.0	dB
Tap Ratio		1 $\pm$ 0.5, 2 $\pm$ 0.7, 3 $\pm$ 1.0, 5 $\pm$ 1.5, 10 $\pm$ 2.5, 20, 30, 50		%
Max. Polarization Dependent Loss	PDL	0.15		dB
Min. Directivity		30		dB
Min. Return Loss	RL	30		dB
Fiber Type		50/125, 62.5/125, 105/125 MM fiber		-
Max. Tensile Load		5		N
Max. Optical Power (CW)	P	500		mW
Operating Temperature	T	0~70		°C
Storage Temperature	T	-40~85		°C
Package Dimension		$\Phi 5.5 \times L35$		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

### Drawing:

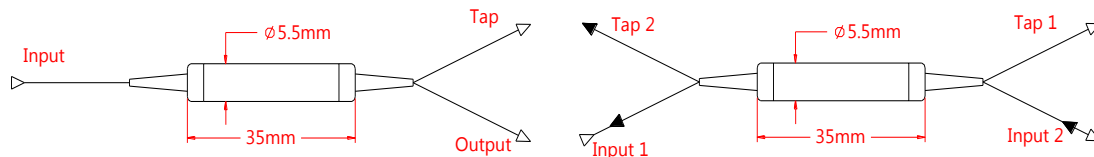

### Ordering Information (Part Number):

MMFIC-**WWW**-**PP**-**RR**-**FF**-**J**-**LL**-**CC**

<b>WWW</b>	<b>PP</b>	<b>RR</b>	<b>FF</b>	<b>J</b>	<b>LL</b>	<b>CC</b>
Wavelength	Port	Coupling Ratio	Fiber Type	Fiber Jacket	Fiber Length	Connector
1310 - 1310nm	12 - 1x2	01 - 1/99	M5 - 50/125	B - 250um Bare Fiber	05 - 0.5m	NE - None
1550 - 1550nm	22 - 2x2	02 - 2/98	M6 - 62.5/125	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
		03 - 3/97	M1 - 105/125		15 - 1.5m	FU - FC/UPC
		05 - 5/95	SS - Specify		20 - 2.0m	SA - SC/APC
		10 - 10/90			SS - Specify	SU - SU/APC
		20 - 20/80				LA - LC/APC
		30 - 30/70				LU - LC/UPC
		40 - 40/60				SS - Specify
		50 - 50/50				
		SS - Specify				