

1053nm In Line Depolarizer

1053nm In Line Depolarizer is a fiber optic passive component which can be used for transferring the polarization light into depolarized light to reduce the influence of the polarization state on the fiber system, it's widely used in Fiber Optic Sensor, Fiber Amplifier and Fiber Optic Gyro. High power type is also available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Optic Gyro
Lab And Research

Features:

Low Polarization Degree
High Power Available
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1053	nm
Bandwidth	BW	± 30	nm
Typ. Insertion Loss	IL	0.4	dB
Max. Insertion Loss	IL	0.6	dB
Max. Degree Of Polarization	DOP	10	%
Max. Extinction Ratio	ER	3	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		PM Panda fiber or HI 1060 fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, slow axis is default aligned to the connector key.

Drawing:

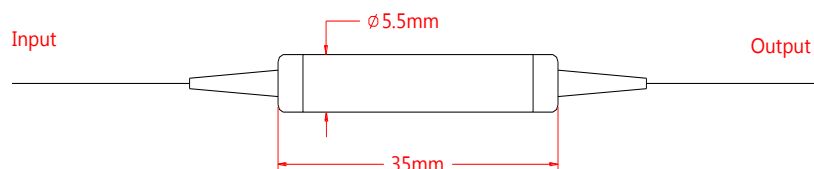

Ordering Information (Part Number):

ILDP-**WWW**-**FF**-**J**-**LL**-**CC**

WWW	FF	J	LL	CC
Wavelength	Fiber Type (Input/Output)	Fiber Jacket	Fiber Length	Connector
1030 - 1030nm	PP - PM Panda fiber on input and output port	B - 250um Bare Fiber	05 - 0.5m	NE - None
1040 - 1040nm	PH - PM Panda fiber on input port	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1050 - 1050nm	HI 1060 fiber on output port	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
1053 - 1053nm		3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
1060 - 1060nm			SS - Specify	SU - SU/APC
1064 - 1064nm				LA - LC/APC
1080 - 1080nm				LU - LC/UPC
				SS - Specify